


單動式彈簧複歸法蘭口球塞閥

Wilson

CYLINDER ACTUATED BALL VALVE ACTUATOR:STR SINGLE ACTING

規格 SPECIFICATION

- Operating pressure: 4~6kg/cm²
- End connection: Flanged end
- Rating: jis10K, 20K ANSI 150#, 300#

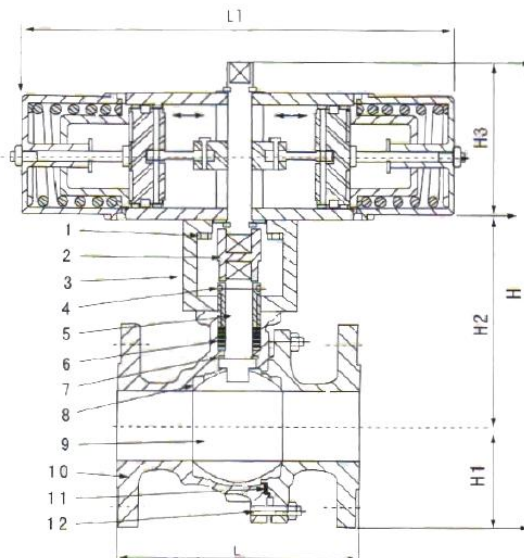

零件與材質 PARTS AND MATERIAL (ASTM)

ITEM	NAME	MATERIAL	ITEM	NAME	MATERIAL
1	BOLT	SUS304	7	PACKING	TEFLON
2	ADAPTOR	SCSI3	8	SEAT RING	TEFLON
3	YOKE	SCSI3	9	BALL	SCSI3
4	GLAND	BC-6	10	BODY	SCSI3
5	STEM	SUS304	11	PACRING	TEFLON
6	PACKING	TEFLON	12	BOLT	SUS304

外形尺寸 DIMENSION TABLE

DN	L	L1	H	H1	H2	H3
15	108	250	235	45	97	90
20	117	311	258	50	99	109
25	127	311	276	62	105	109
32	140	365	276	62	105	123
38	165	365	338	68	147	123
50	178	365	350	77	150	123
65	190	417	407	86	178	148
80	203	417	416	92	181	148
100	229	516	482	105	204	173
125	300	595	541	132	207	202

P.7



偉群國際有限公司
新竹縣竹北市國盛街271號
電話：03-555-6551，傳真：03-555-0352
<http://www.wilson-co.com.tw>

Wilson-International Co.
No.271, Guosheng St., 302-44 Zhubei City,
Hsin Chu County, Taiwan, R.O.C.

WE SERVE. WE CARE. WHAT YOU NEED. EVERY WHERE AND EVERY TIME.